



ROCWARE[®]

4K Dual-Lens PTZ Video Bar

Dual-Lens Integration, Simplify Meetings for Medium to Large Rooms

RB20



BYOD



Dual-Lens



Mechanical PTZ



Presenter Tracking



Speaker Framing

Designed for medium-to-large meeting rooms, RB20 integrates a 4K panoramic camera, close-up camera, digital microphone, and full-range speaker into a single unit, minimizing cabling and simplifying installation. Equipped with AI video processing algorithms, it dynamically tracks meeting participants, automatically adjusts framing, and captures panoramic and close-up views without manual intervention, delivering intelligent and seamless remote collaboration.

Dual-Lens Integration




The RB20 features a dual-lens design with a 120° wide-angle 4K lens for panoramic views and a 70° wide-angle 12x optical zoom for detailed close-ups. It also supports dual video with a picture-in-picture display, enhancing the meeting experience.

4K Ultra-HD Image




The close-up lens uses a high-quality UHD CMOS sensor with a 1/2.5-inch size and 8.29 megapixels, while the panoramic lens uses a CMOS sensor with a 1/2.8-inch size and 8.51 megapixels, delivering clear images with 4K@30fps Ultra-HD resolution.

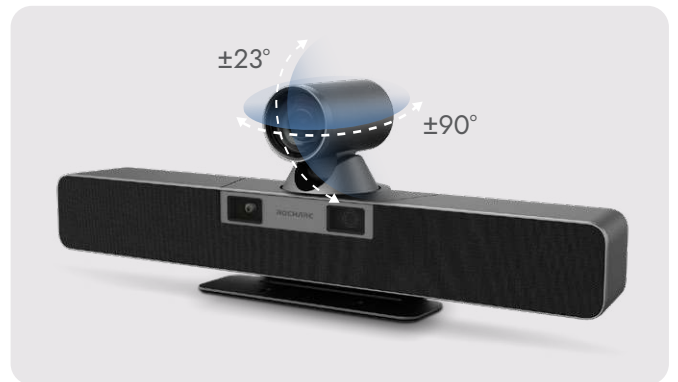

The close-up camera has a silent mechanical PTZ system, enabling horizontal rotation of $\pm 90^\circ$ and vertical rotation of $\pm 23^\circ$, enhancing its shooting range. The panoramic camera features an electronic PTZ for clear images during zooming.

Group Framing

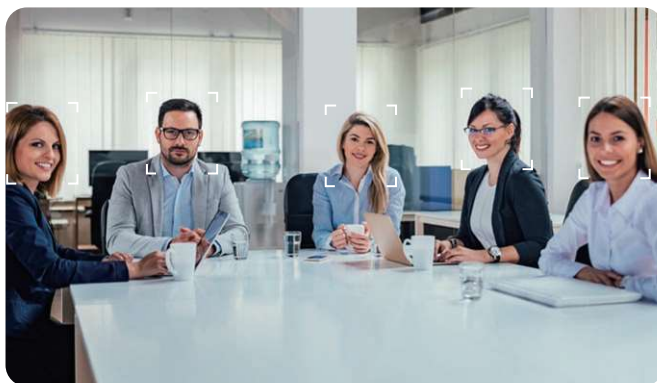

With built-in face and human shape recognition and intelligent framing algorithms, it can identify the number of participants and their position changes, and automatically adjust the camera's viewing angle and focal length to ensure that everyone is clearly shown in the frame for the best shot.

Presenter Tracking



The speaker features built-in gesture, ReID, and ReFace recognition technologies, allowing it to activate tracking mode with simple gestures. The AI algorithm accurately identifies body shape and face, enabling the close-up camera to automatically track and capture shots as the speaker moves.

Smart Gallery




Powered by advanced AI algorithms for head, face, and body detection, the system automatically adjusts to multi-split screen layouts based on the number of participants. It captures and evenly displays close-ups of each participant, ensuring remote attendees can clearly see everyone, making meeting interactions more engaging and natural.

Speaker Framing



RB20 has a built-in sound localization algorithm. When a participant speaks, the camera will lock onto the speaker based on sound, automatically changing the color of the close-up shot's border to indicate the speaker's position and provide a face-to-face communication experience.

8m Balanced Pickup

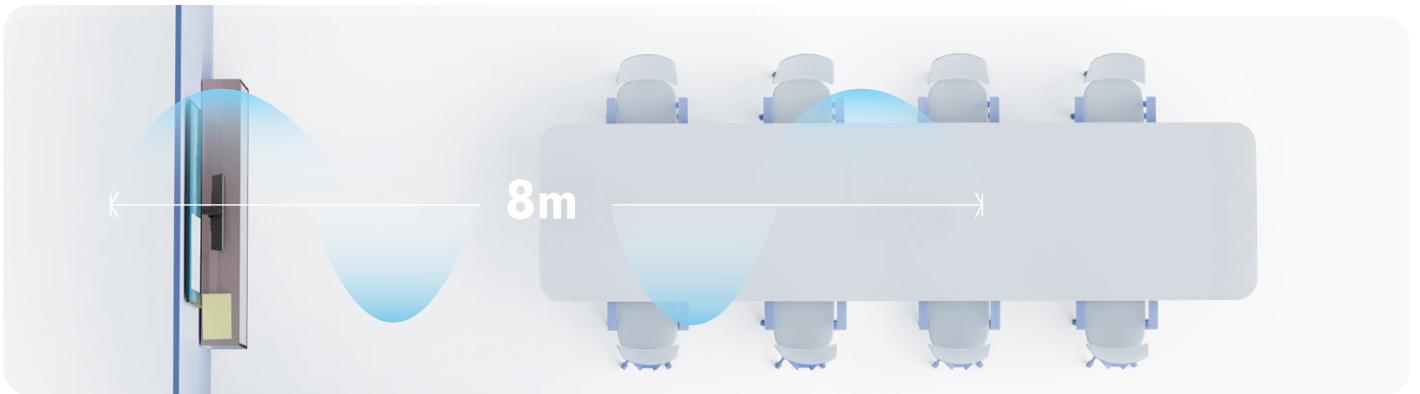

The built-in pickup array features 6 analog silicon microphones with beamforming technology and AI audio algorithms to suppress noise and reverberation. It ensures audio pickup within 8 meters and supports expandable microphones for extended range.

Hi-Fi Stereo Speaker



RB20 is equipped with 2 full-range speakers featuring bass-enhanced acoustic chambers, delivering rich, layered sound with 8W powerful output to ensure clear audio coverage throughout the entire conference space.

BYOD Mode



Via a wired BYOD pod, the videobar allows participants using their familiar personal devices (such as laptops) to access the integrated AV functions, join meetings, and deliver low-latency 4K screen sharing.

RB20 SPECIFICATIONS

▼ CLOSE-UP CAMERA

Sensor	1/2.5 inches, CMOS, Effective Pixels: 8.29 Megapixels
Focal Length	f=4.4~51.1mm, F1.8~2.6
Optical Zoom	12X
Horizontal FOV	70° ~7.4°
Vertical FOV	42° ~4.1°
Pan Angle	-90° ~ +90°
Tilt Angle	-23° ~ +23°
Pan Speed	1.7° ~ 76° /s
Tilt Speed	0.5° ~ 15° /s
PTZ	Support
Backlight Compensation	Support
Digital Noise Reduction	2D & 3D Digital Noise Reduction
SNR	≥ 50dB

▼ PANORAMIC CAMERA

Sensor	1/2.8 inches, CMOS, Effective Pixels: 8.51 Megapixels
Focal Length	2.8mm
Diagonal FOV	120°
Horizontal FOV	110°
Vertical FOV	75°
EPTZ	Support
White Balance	Auto
Backlight Compensation	Support
Digital Noise Reduction	2D & 3D Digital Noise Reduction
SNR	≥ 50dB

▼ AUDIO SPEC

Speaker	2 full-range speakers, individual output power:8W
Microphone Array	6 beamforming microphones with 8m pickup distance
Extended MIC	Supports up to 3 microphones via DMIC interface
Audio 3A Algorithm	AI-Powered AEC/ANC/AGC
Sampling Rate	Mic 48K, Speaker 48K

▼ USB FEATURES

Operating System Supported	Windows® 7 (only supports 1080p and below), Windows 8.1, Windows 10 or higher; MacOS™ 10.10 or higher; Google™ Chromebook™ Version 29.0.1547.70 or higher; Linux (Requires Supporting for UVC)
Configuration Requirements	2.4 GHz Intel® Core 2 Duo processor or higher; 2GB memory or higher; USB 2.0 interface (4K requires USB 3.0)
Connection Type	USB 3.0, backward compatible with USB 2.0
Color Space/Compression	H.264 / MJPEG / YUY2
USB Video Communication Protocol	UVC 1.1, UAC 1.0
UVC PTZ Control	Support

▼ VIDEO OUTPUT SPEC

Video Output Format	4KP30, 1080P30, 1080P60, 720P60
---------------------	---------------------------------

▼ I/O INTERFACES

USB 3.0	1 × USB 3.0, type-C, Support audio/video transmission and firmware upgrade 1 × USB3.0, type-A, Reserved
HDMI	1 × HDMI OUT, 1 × HDMI IN
Network Interface	1 × RJ45, 10/100/1000M adaptive Ethernet port
EXT Interface	1 × RJ45, connects to expansion microphone or wired BYOD pod, and supports PSE power supply(IEEE802.3af)
Power Interface	DC 12V
WiFi	Wifi 5, 2.4G/5G Dual-band, IEEE802.11 a/b/g/n/ac
Remote Controller	Support

▼ GENERIC SPEC

Safety Protection	Kingston anti-theft lock socket
Power	DC 12V
Operating Temperature	0° C ~ 40° C
Storage Temperature	-40° C ~ 60° C
Dimension (W × D × H)	Without Stand: 600 × 127.1 × 182.1mm With Stand: 600 × 127.1 × 217.1mm
Net Weight	4kg



Independent Research and Development

Localized Audio and Video Technology

For 11 years since its establishment, Rocware has adhered to independent research, development and innovation, continuously invested in improvement, and fully mastered the core algorithm technology in the field of audio and video. The entire product line is independently controllable, safe, reliable, and highly competitive.



Own Factory

Complete Self-owned Supply Chain

Rocware has its own factory, it can independently complete part of the mold design and manufacturing, CNC processing, plastic injection molding and other basic material production. It also has an internationally advanced high-speed double-sided PCB SMT line, precision equipment assembly and testing line, to ensure product quality and stable supply.



support@rocware.com

Well-developed After-sales Support System

Rocware has set up five major marketing centers around the world, with more than 30 after-sales service outlets. It provides 7*12 hour customer service telephone support, as well as various online and offline technical support and after-sales services to comprehensively ensure the user experience.

ROCWARE®

Rocware(US) Inc.

1770 Evergreen Street
Duarte, CA 91010

Rocware Europe

Margriet Toren, Haaksbergweg 75,
Unit 9.1, WS19, 1101 BR Amsterdam,
Nederland

Rocware Asia

3-1 No.2, Honghui Industrial Park,
Xin'an Street, Bao'an District,
Shenzhen, China